

TATRA

TERRNo1

28PR25/451

Cab-chassis TATRA T815-28PR25 28 270 6x6.2/451 is designed to be completed by special-purpose bodies to be operated on public roads as well as in harsh off-road environment

DIMENSIONS

Width (overall)	2,550 mm
Width (by ADR definition)	2,500 mm
Track Front	2,034 mm
Track Rear	1,776 mm
Ground clearance	260 mm

WEIGHT

Unladen/Kerb mass (ISO)	9,800 kg
Front	5,500 kg
Rear	2x2,150 kg
Payload	18,700 kg
GVM/GVW	28,500 kg
GCM/GCW	49,200 kg
Max. permissible load	8,000 kg
Front	
Rear	2x11,500 kg

FEATURES

Climbing capacity at GVM	99.9 %
Top speed	100 km/h
Turning circle diameter (outside)	21,0 ± 1,0 m

ENGINE

Type TATRA T3C-928-81 EURO III	
No. of cylinders	8
Bore x stroke	Ø120 x 140 mm
Swept volume	12,667 cm ³
Max Power (ECE)	270 kW @ 1,800 rpm
Max Torque (ECE)	1,850 Nm @ 1,000 rpm

CLUTCH

Type TATRA MFZ 1x430, single-plate

GEARBOX

Type TATRA 10 TS 180 synchromesh	
No. of forward gears	10
No. of reverse gears	2

AUXILIARY GEARBOX

Type TATRA 2,30 TRK downward, 2-speed, engageable at standstill

PTO

Optional to meet customer requirements

STEERING

R.H. compact steering

FRONT AXLE

Steered, driven with swinging half-axles, disengageable drive, differential Torsion bars and telescopic shock absorbers

REAR AXLES

Driven, with swinging half-axles, inter-axle differential, axle differentials Air bellows with optional swaybars

TYRES, RIMS

	front	rear
Tyres	385/65R22.5	315/80R22.5
Rims	22.5x11.75	22.5x9.00

BRAKES

Four separate brake systems: operational with load-related automatic adjustment system and ABS, emergency brake, parking brake, relief brake

CABIN

Forward-tilting, rounded windshield, two-seat, heating and air-conditioning unit, separate diesel heater

ELECTRIC EQUIPMENT

Circuit voltage	24V, negative grounded
Battery	2x12V 180HD (180 Ah)
Generator	28 V/ 55A
Starter motor	24 V/6.6 kW

FUEL TANK

320 litres standard, optional 220 or 420


STANDARD EQUIPMENT

Speed limiter -WABCO
Electric control, heated rear view mirrors - MEKRA

TOWING

Optional 50 mm pin tow coupling (replaces standard towing pin)

All height-related information applies to a loaded vehicle

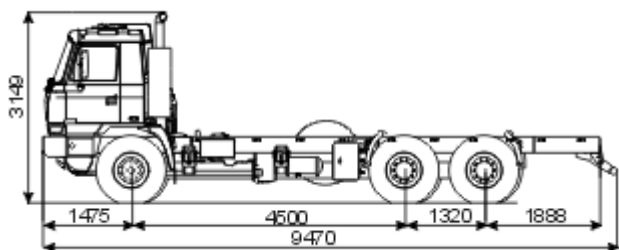

Vehicle operation can be further limited by local regulations
Manufacturer reserves the right to modify vehicles without a prior notice

www.tatratrucks.com.au

28/02/2007

FROM

OFFROAD TRUCKS AUSTRALIA PTY LTD

ABN 12 091 646 481 DL 16670

25 Garnet Way (Cnr Eva St)
MADDINGTON WA 6109

PO Box 342
FORRESTFIELD WA 6058
AUSTRALIA



T: (08) 9459 8911 (Australia)
+61 (8) 9459 8911 (Int)
F: (08) 9459 8966
M: 0417 009 994
E: tatra@offroadtrucks.com.au
W: www.offroadtrucks.com.au